


Fogging Machine - BF400

Division	Type	BF150 Automatic	BF150 Manual	BF150P	BF200	BF200P	BF400	Main Body	
								Chemical Tank	
Type		Thermal Aerosol Fog	Thermal Aerosol Fog	Thermal Aerosol Fog	Aerosol and U.I.V	Aerosol and U.I.V		Thermal Aerosol Fog	
Starting Method		Push Button Start	Thermal Aerosol Fog	Thermal Aerosol Fog	Aerosol and U.I.V	Aerosol and U.I.V		Thermal Aerosol Fog	
Power Supply		12VDC Rechargeable Battery	12VDC Rechargeable Battery	12VDC Rechargeable Battery	12VDC Rechargeable Battery	12VDC Rechargeable Battery		12VDC Rechargeable Battery	
Dimensions (LxWxH)mm		1350x230x340	1350x230x350	1350x270x320	1350x230x340	1350x270x320		1000x340x390 1330x710x490	
Weight (empty)		9kg	9kg	8kg	10kg	8.5kg		35kg 20kg	
Gasoline Tank Capacity		1.8L	1.8L	1.5L	1.8L	1.5L		3.3L/h	
Chemical Tank Capacity		8L	8L	6L	8L	6L		100L	
Chemical Output		40L/h	40L/h	40L/h	50L/h	50L/h		85L/h	
Chemical Tank Material		Stainless Steel	Stainless Steel	Plastic (Polyethylene)	Stainless Steel	Plastic (Polyethylene)		Stainless Steel	
Shipping Data (LxWxH)mm		1360x240x350	1360x240x360	1360x280x330	1360x240x350	1360x280x330		1400x730x510 1080x425x405	
Shipping Data Weight(empty)		12.9kg	12.9kg	12kg	13.3kg	12.7kg		50kg 30kg	

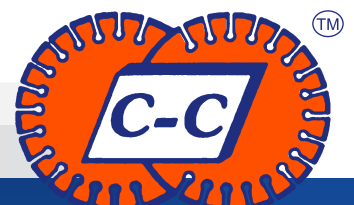

How to use

Item to check before using

- Make sure fuel and chemical caps are tightly closed(The machine will not operate if they are not.)
- Make sure the connecting wires are tightly connected to the main body.(main body connector, power connector, chemical coupler etc.)
- Open fuel valve and chemical adjustment valve on the machine.

How to start-up

- Turn on power by flipping power switch up, red light is on the power lamp should come on.
- To start the machine hold the start button down while continuously pressing the fuel button.
- If it does not operate, press the start button repeatedly until it makes a "vroom" sound which means combustion is occurring in the carburetor.
- Repeat steps a to c until it starts.

How to spray chemical

- Flip chemical spray switch up after the machine is started.
- Adjust the spray to the right amount of the chemical by using the chemical adjustment valve

When you are finished using the machine.

- Flip the chemical spray switch down.
- You should wait for about 10 second.
- And flip the fuel button down.
- Open the chemical tank cap

Machine Features

This machine has a control box, so the machine can be placed in the back of an open bed truck and operated by a passenger in the vehicle.

Start-up is simple

The 12V DC battery of the truck is used by connecting it to the control box. Then you simply press the start and fuel buttons at the same time, and the machine will start.

Duration of the Machine

This machine is made almost entirely of Stainless Steel(chemical tank, fuel tank etc), which prevents corrosion due to chemical, and fuels

It is not necessary to use an additional battery because you can use the battery of the vehicle

Little Heat Generation

The Machine has been designed so it is cooled by two air-intake valves, that are connected to the fuel ignition part of the machine.

This allows the machine to remain cool during use.

Strong Igniter

The igniter uses a 12V DC battery so that starting the machine is quick and easy.

Easily Repaired

All components are designed for easy assembly/disassembly, the fuel line is made of a transparent material, and the spark plug is easily seen, so it is easy to spot problems when they happen.

